
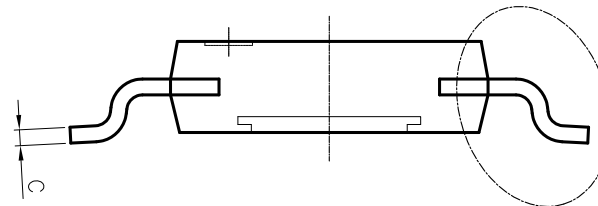


DETAIL A

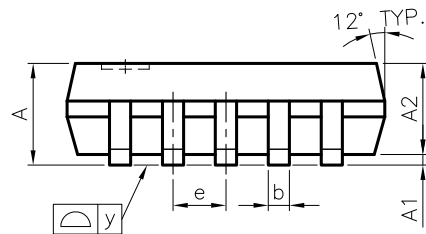

DETAIL A

NOTE :

1. CONTROLLING DIMENSION : mm
2. LEAD FRAME MATERIAL : OLIN C7025
3. DIMENSION "D" DOES NOT INCLUDE MOLD FLASH, TIE BAR BURRS AND GATE BURRS. MOLD FLASH, TIE BAR BURRS AND GATE BURRS SHALL NOT EXCEED 0.005"[0.12mm] PER END DIMENSION "E1" DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010"[0.25mm] PER SIDE.
4. DIMENSION "b" DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.003"[0.08mm] TOTAL IN EXCESS OF THE "b" DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSION AND AN ADJACENT LEAD TO BE 0.0028"[0.07mm]
5. TOLERANCE : ±0.010"[0.25mm] UNLESS OTHERWISE SPECIFIED.
6. OTHERWISE DIMENSION FOLLOW ACCEPTABLE SPEC.
7. REFERENCE DOCUMENT : JEDEC SPEC MO-187

③

SYMBOLS	DIMENSIONS IN MILLIMETERS		
	MIN.	NOM.	MAX.
A	---	---	1.10
A1	0.05	---	0.15
A2	0.76	0.86	0.95
b	0.17	0.225	0.33
c	0.08	0.15	0.23
D	2.90	3.00	3.10
E	4.80	4.90	5.00
E1	2.90	3.00	3.10
e	---	0.50	---
L	0.40	0.53	0.66
y	0.00	---	0.076
θ	0°	3°	6°

EXPOSED PAD DIMENSION (mm)							
OPTION	PAD SIZE	E2			D1		
		MIN	NOM	MAX	MIN	NOM	MAX
A.)	1.7272x1.788mm	1.2192	---	---	1.280	---	---
B.)	1.7272x2.3mm	1.2192	---	---	1.792	---	---

CUSTOMER :		LINGSEN 5-1 NAN 2ND ROAD T.E.P.Z PRECISION IND., LTD TAICHUNG, TAIWAN R. O. C	
APPROVED BY	DATE	TITLE:	
DRAW BY: <i>Jasmin Liu</i>	04/27/15	10L MSOP PACKACE OUTLINE DRAWING (FOR EXPOSED PAD STRUCTURE)	
CHECK BY: <i>Andersen Chang</i>	04/28/15	DWG. NO.	REV. 3
APPROVAL: <i>Terence Lin</i>	04/30/15	PO-MSOP-006	
APPROVAL: <i>Andy Yang</i>	04/30/15	UNIT : mm	SCALE : 20/1 SHEET 1 OF 1